


MATERIAL DATASHEET 17

KE-no.:	013523		
Construction:	Nomex fabric		
Final treatment:	Heat-set, shrinkage- and permeability-stabilized		
Weight	oz/yd ² :	6.8	(%) -10/+10
Thickness	mil:	22	(%) -10/+10
Tensile strenght warp/weft	lb _f /in:	131 / 103	(%) -10/+10
Elongation (at first break)	%:	36 / 42	
Resistance to tearing warp/weft	lb _f :	31 / 27	(%) -10/+10
Permeability	CFM/ft ² :	20 at 0.5 inWG	(%) -9 / +9
Retention grade	:	F6 (*)	
Shrinkage in wash	%:	1	
Fire resistance	:	Flame retardant	
Melting point	°F:	N/A	
Spontaneous ignition temperature	°F:	N/A	
Water absorption (in standard climate)	%:	5.00	
Electrostatic resistance	Ohm/cm:	3 x 10 ⁸	
Operating temperature max./min. (peak)	°F:	+300/-60 (peak: 400)	
Resistance to aging	:	Excellent	
Resistance to vibrations, motion	:	Excellent	
Resistance to solvents	:	Excellent	
Resistance to acids	:	Not recommended	
Resistance to bases	:	Good	
Resistance to oxidants, light, etc.	:	Good	

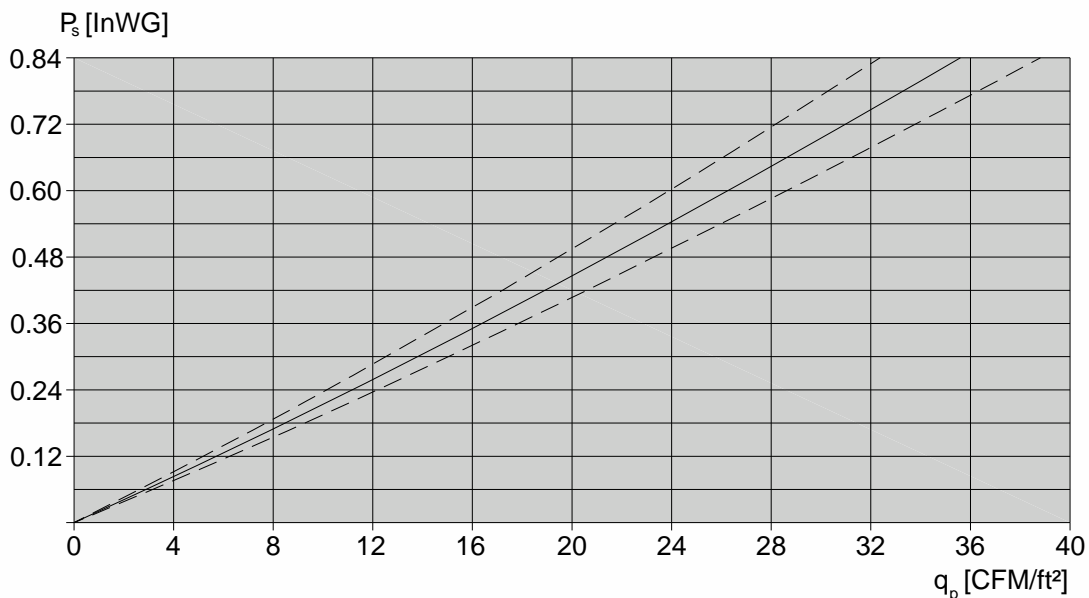

Quality grades: Excellent • Good • Medium • Less good • Not recommended
 Comments: (*) Recomm. KE-measurement • (**) Washed and dried acc. to KE Fibertec instruction

This document and all information thereon is the property of KE Fibertec AS. It must not be copied, imparted to a third party or used for any other purpose without the written consent of KE Fibertec AS. Data are subject to alterations.

Rev.: May 2008