


**MATERIAL DATASHEET 6**

KE-no.:	025600		
Construction:	Trevira CS special fabric (HDC)		
Final treatment:	Heat-set, shrinkage- and permeability-stabilized		
Weight	oz/yd <sup>2</sup> :	8.3	(%) - 5/+ 5
Thickness	mil:	24	(%) -10/+10
Tensile strenght warp/weft	lb <sub>f</sub> /in:	211 / 69	(%) -10/+10
Elongation (at first break)	%:	42 / 28	
Resistance to tearing warp/weft	lb <sub>f</sub> :	31 / 45	(%) -10/+10
Permeability	CFM/ft <sup>2</sup> :	43 at 0.5 inWG	(%) -8 /+14
Retention grade	:	F5 (*)	
Shrinkage in wash	%:	< 0.5 (**)	
Fire resistance	:	Flame retardant	
Melting point	°F:	490	
Spontaneous ignition temperature	°F:	946	
Water absorption (in standard climate)	%:	0.40	
Electrostatic resistance	Ohm/cm:	2 x 10 <sup>10</sup>	
Operating temperature max./min. (peak)	°F:	+140/-49 (peak: 176)	
Resistance to aging	:	Excellent	
Resistance to vibrations, motion	:	Excellent	
Resistance to solvents	:	Excellent	
Resistance to acids	:	Good	
Resistance to bases	:	Medium	
Resistance to oxidants, light, etc.	:	Excellent	

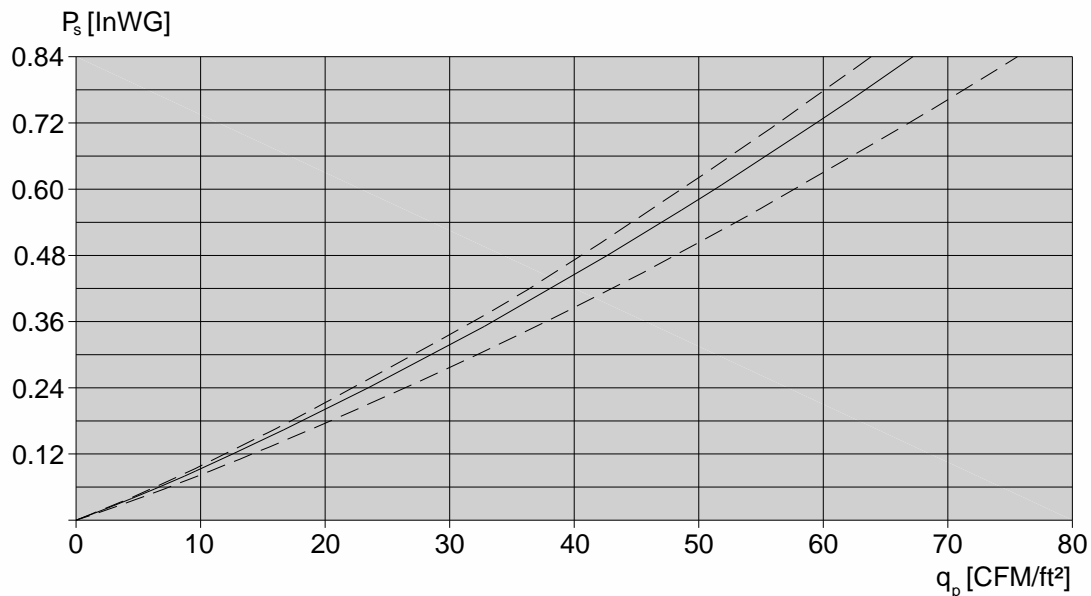

Quality grades: Excellent • Good • Medium • Less good • Not recommended  
 Comments: (\*) Recomm. KE-measurement • (\*\*) Washed and dried acc. to KE Fibertec instruction

*This document and all information thereon is the property of KE Fibertec AS. It must not be copied, imparted to a third party or used for any other purpose without the written consent of KE Fibertec AS. Data are subject to alterations.*

Rev.: May 2008