


**MATERIAL DATASHEET 10**

KE-no.:	026330		
Construction:	Trevira CS special fabric – Coated with PU		
Final treatment:	Heat-set and shrinkage stabilized		
Weight	oz/yd <sup>2</sup> :	8.8	(%) - 5/+ 5
Thickness	mil:	18	(%) -10/+10
Tensile strenght warp/weft	lb <sub>f</sub> /in:	228 / 206	(%) -10/+10
Elongation (at first break)	%:	30 / 35	
Resistance to tearing warp/weft	lb <sub>f</sub> :	18 / 20	(%) -10/+10
Permeability	CFM/ft <sup>2</sup> :	0 at 0.5 inWG	(%) -0 / +0
Retention grade	:	-	
Shrinkage in wash	%:	< 0.5 (**)	
Fire resistance	:	Flame retardant	
Melting point	°F:	490	
Spontaneous ignition temperature	°F:	946	
Water absorption (in standard climate)	%:	0.40	
Electrostatic resistance	Ohm/cm:	2 x 10 <sup>10</sup>	
Operating temperature max./min. (peak)	°F:	+140/-49 (peak: 176)	
Resistance to aging	:	Excellent	
Resistance to vibrations, motion	:	Excellent	
Resistance to solvents	:	Excellent	
Resistance to acids	:	Good	
Resistance to bases	:	Medium	
Resistance to oxidants, light, etc.	:	Excellent	

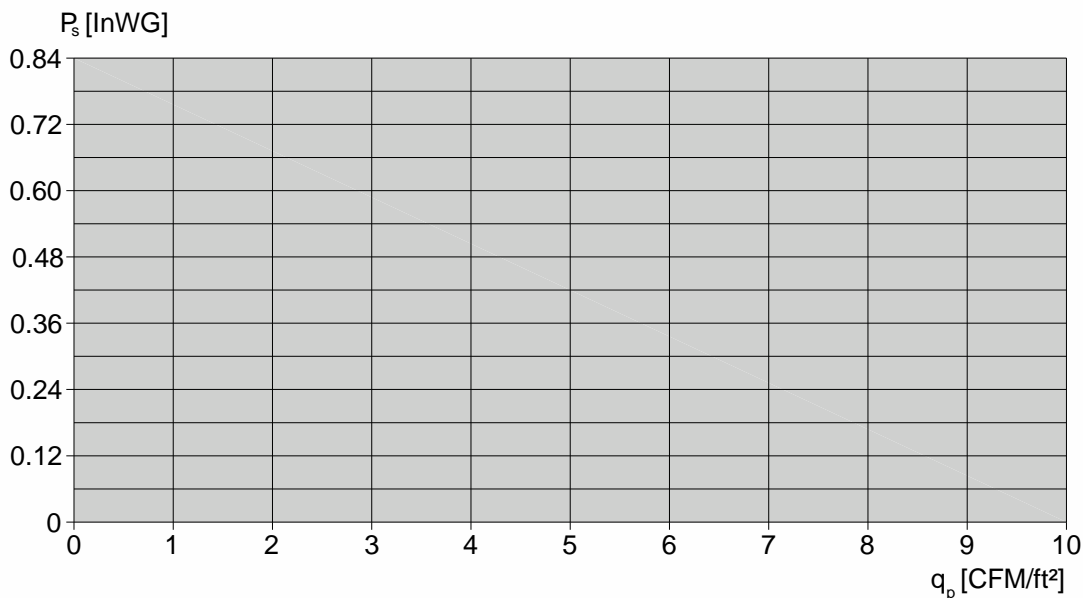

Quality grades: Excellent • Good • Medium • Less good • Not recommended  
 Comments: (\*) Recomm. KE-measurement • (\*\*) Washed and dried acc. to KE Fibertec instruction

*This document and all information thereon is the property of KE Fibertec AS. It must not be copied, imparted to a third party or used for any other purpose without the written consent of KE Fibertec AS. Data are subject to alterations.*

Rev.: May 2008