





# Safetrack Arch

*The superior 3:1 mounting system*

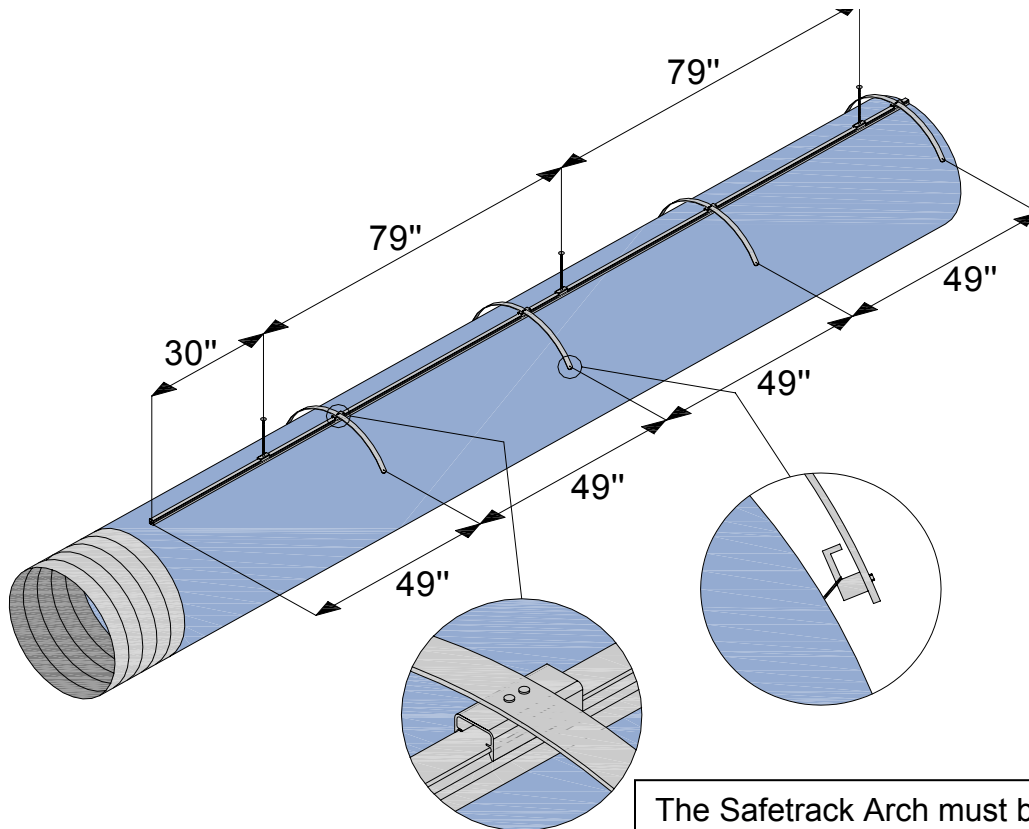

The Safetrack Arch must be fitted every 49"



Diameter duct	Width	Weight
16"	1' - 5"	5.15 oz
18"	1' - 7"	5.64 oz
20"	1' - 9"	6.07 oz
22"	1' - 11"	6.56 oz
24"	2' - 11/16"	7.02 oz
26"	2' - 2 1/2"	7.48 oz
28"	2' - 4 5/16"	7.94 oz
30"	2' - 6 1/8"	8.40 oz
32"	2' - 7 15/16"	8.85 oz
34"	2' - 9 3/4"	9.31 oz
36"	2' - 11 9/16"	9.77 oz
38"	3' - 1 3/8"	10.23 oz
40"	3' - 3 3/16"	10.69 oz
42"	3' - 5"	11.15 oz
44"	3' - 6 13/16"	11.61 oz
46"	3' - 8 5/8"	10.06 oz
48"	3' - 10 7/16"	12.52 oz

The Safetrack Arch brackets keep the Textile duct looking inflated even when the air is off and makes for an aesthetically appealing installation.

The unique Safetrack rail is constructed in a way the Arch bracket can easily be clicked on the single top rail without using any tools.

Unlike similar cable based systems the Safetrack Arch system has 100% continuous support of the duct and the rail is sturdy enough to support the weight of the Arch & duct with **no sagging** if installed according to KE mounting instructions.

Inflation "popping" in the Textile duct caused by the initial Air Handler start up can be reduced by using the Safetrack Arch.